

VIDEO STREAMING PLATFORM

GENERIC REQUIREMENTS

TEC/GR/SA/VST-001/01/MAR-09

© TEC

TELECOMMUNICATION ENGINEERING CENTRE

KHURSHID LAL BHAWAN, JANPATH

NEW DELHI-110 001

INDIA

All rights reserved and no part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise without written permission from the Telecommunication Engineering Centre, New Delhi.

VIDEO STREAMING PLATFORM
NO. TEC/GR/SA/VST-001/01/MAR-09

HISTORY SHEET

S.No	Date of issue	GR.No	Remarks
1	MARCH-2009	TEC/GR/SA/VST-001/01/MAR-09	1 st issue

VIDEO STREAMING PLATFORM
NO. TEC/GR/SA/VST-001/01/MAR-09

References

ITU-T Documents:

S.No.	Document No.	Description
1.	H.263	Video coding for low bit rate communication
2.	H.264	Advanced video coding for generic audiovisual services

IETF (Internet Engineering Task Force) Documents:

S.No.	Document No.	Description
1.	RFC 2326	Real Time Streaming Protocol (RTSP)
2.	RFC 1945	Hypertext Transfer Protocol -- HTTP/1.0"
3.	RFC 2616	Hypertext Transfer Protocol -- HTTP/1.1",
4.	RFC 1889	RTP: A Transport Protocol for Real-Time Applications
5.	RFC 2190	RTP Payload Format for H.263 Video Streams
6.	RFC 2429	RTP Payload Format for the 1998 Version of ITU-T Rec. H.263 Video (H.263+)
7.	RFC 3016	RTP Payload Format for MPEG-4 Audio/Visual Streams
8.	RFC 3984	RTP Payload Format for H.264 Video
9.	RFC 3588	Diameter Base Protocol

TEC Standard:

S.No.	Document No.	Description
1.	SD/EMI-02/03 May.2006 with amendment No. 1	EMI/EMC Standards

3GPP Standards:

S.No.	Document No.	Description
1.	AMR	Audio data compression scheme optimized for speech coding.
2.	324M	Multimedia communication services
3.	3GP / 3GPP	Multimedia container format

ISO/IEC Moving Picture Experts Group (MPEG):

S.No.	Document No.	Description
1.	MPEG-4	Compression of AV data for web (streaming media) and voice (telephone, videophone) and broadcast television applications.
2.	MPEG-2	Generic coding of moving pictures and associated audio information
3.	MPEG-1	Audio Layer 3 :MP3, Digital audio encoding format

IEC & IS Documents:

S.No.	Document No.	Description
1.	IEC 61000-4-2 {2001}	Testing and measurement techniques of Electrostatic discharge immunity test
2.	IEC 61000-4-3 (2006)	Testing and measurement techniques-Radiated RF Electromagnetic Field Immunity test
3.	IEC 61000-4-3 (2006)	Testing and measurement techniques-Radiated RF Electromagnetic Field Immunity test
4.	IEC 61000- 4- 4 {2004}	Testing and measurement techniques of electrical fast transients/burst immunity test
5.	IEC 61000-4-5 (2005)	Testing & Measurement techniques for Surge immunity test
6.	IEC 61000-4-6 (2004) with amendment 1 (2004) & amd. 2 (2006)	Testing & measurement techniques-Immunity to conducted disturbances induced by radio- frequency fields
7.	IEC 61000-4-11 (2004)	Testing & measurement techniques- voltage dips, short interruptions and voltage variations immunity tests
8.	IEC 60950 {2001}} and IS 10437{1986}	Safety requirements of radio transmitting equipments
9.	IS 8437 (1993) and IEC 60479-1(1984)	Guide on the effects of current passing through the human body

VIDEO STREAMING PLATFORM
NO. TEC/GR/SA/VST-001/01/MAR-09

CONTENTS

S.No.	Title	Page No.
1.	Introduction	1
2.	Description of System and Architecture	2
3.	Functional Requirements	3
4.	Interconnectivity and Interoperability Requirements	6
5.	Quality Requirements	7
6.	EMI/EMC Requirements	8
7	Safety Requirements	11
8.	Security	12
9.	Other Mandatory Requirements	13
10.	Desirable Requirements	15
	Glossary	16

CHAPTER-1

Introduction

- 1.1** This document describes the Video Streaming Platform to be used in Indian Telecom Network. Video Streaming Platform shall support video streaming of contents to different kinds of mobile, broadband and other terminals. This can be on demand stored contents or live streaming contents.
- 1.2** It shall also have a content adaptation capability to provide various video value added services such as internet contents, flash contents, video streaming clips of different formats, real-time live sources (e.g. surveillance cameras), etc.
- 1.3** It shall be able to deliver services to 2.5G, EDGE, 3G packets, HSDPA through HTTP/RTSP/RTP protocols, broadband /SIP video phones or PC phones via SIP/RTP Application/Media Server and 3G circuit-switched handsets via the Video Gateway. The Streaming platform can cater to different services/applications, such as Video Streaming, Video blogging, Video content access, Video Surveillance, Video Ring Back Tone (VRBT) etc.

CHAPTER-2

Description of System and Architecture

2.0 Network Architecture

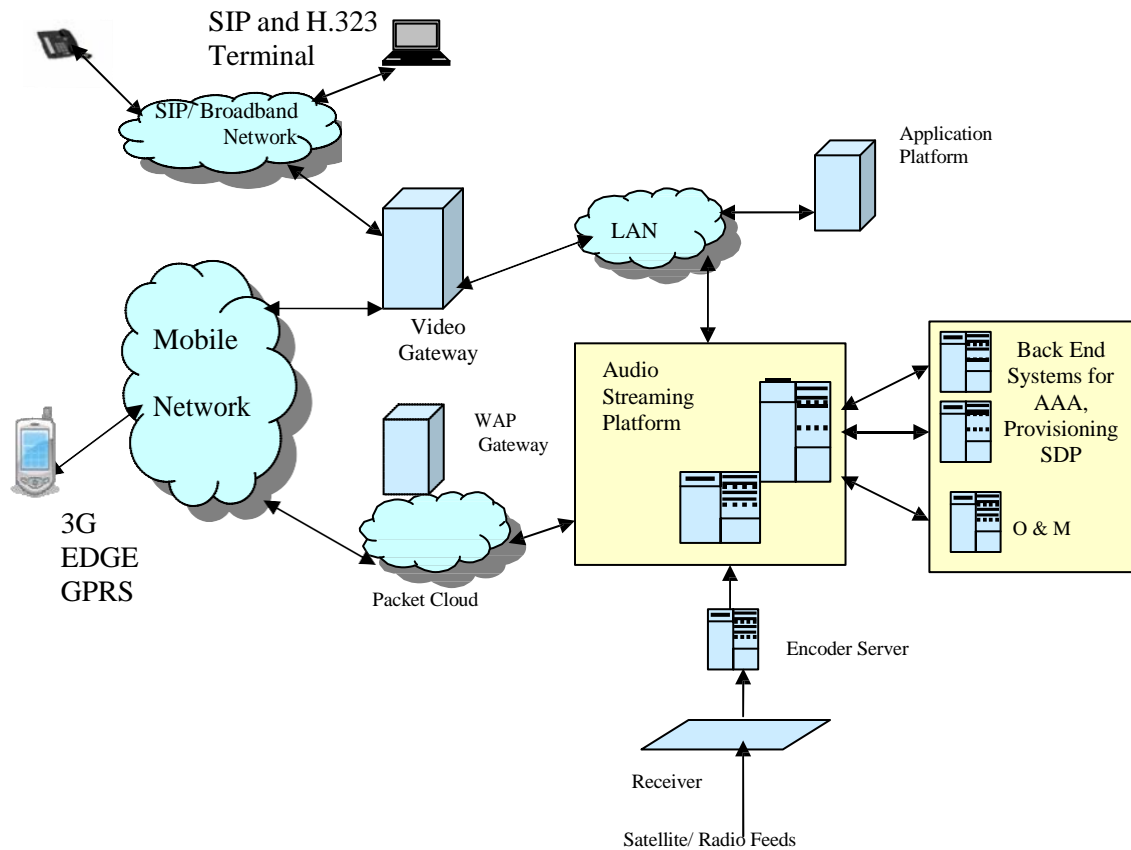


Fig 1: Video Streaming Platform

Figure 1 shows the Video Streaming platform in a Telecom network. The mobile network may be any packet access network. For packet based access on SIP from PC clients or IP video phones, the streaming platform interfaces with gateway to the application platform which is in the operator's network. For circuit switched access (3G-324M) for streaming, the streaming platform interfaces with the Video Gateway. For packet switched access for streaming, the platform interfaces with the WAP Gateway. The Streaming platform can cater to different services/applications, such as Video Streaming, Video blogging, Video content access, Video Surveillance, Video Ring Back Tone (VRBT) etc.

CHAPTER-3

Functional Requirements

3.1 Functional Requirements

- 3.2** The Video streaming platform shall support the delivery of packet-based multimedia streams to mobile and broadband terminals through the RTSP and RTP protocols.
- 3.3** The streaming platform shall support the adaptation from a file to deliver streaming content to a user without waiting for file download to handset using HTTP or RTSP protocols.
- 3.4** The streaming platform shall support progressive download from 3gpp2 container format.
- 3.5** The streaming platform shall support both live streaming (unicast and multicast) and on demand streaming (unicast) of stored contents.

3.6 Protocol Support

- 3.6.1 The Video streaming platform shall support RTSP protocol according to RFC 2326.
- 3.6.2 The streaming platform shall support HTTP 1.0 & HTTP 1.1 protocols according to RFC 1945 and RFC 2616 respectively.

3.6 Source Media Support

- 3.6.1 The platform shall support the following media container formats:
 - i. 3GP.
 - ii. 3GPP.
 - iii. FLV.
 - iv. WAV.
 - v. MP4.
 - vi. MPEG-1.
 - vii. MOV.
 - viii. AVI.
 - ix. MPEG2-TS.
 - x. MPEG-TS/UDP Live Stream.
 - xi. RTP Live Streams.
- 3.6.2 The platform shall support the following video codecs:
 - i. H.263
 - ii. MPEG4, level 0
 - iii. H.264
 - iv. MPEG-2 TS
 - v. H.263-Sorenson

- vi. WMV
- vii. Motion JPEG
- viii. FLV

3.6.3 The platform shall support the following audio codecs:

- i. GSM-AMR-NB
- ii. AAC
- iii. GSM-AMR-WB
- iv. MP3 (MPEG-1 Audio Layer3)
- v. WMA

3.7 The streaming platform shall support the following video codecs on the Terminal side:

- i. H.263
- ii. H.264
- iii. MPEG4

3.8 The streaming platform shall support the following audio codecs on Terminal side:

- i. AMR-NB
- ii. AAC

3.9 RFC Compliance

3.9.1 The platform shall comply with RFC 2326 for RTSP

3.9.2 The platform shall comply with RFC 1945 for HTTP 1.0

3.9.3 The platform shall comply with RFC 2616 for HTTP 1.1

3.9.4 The platform shall comply with RFC 1889 for RTP for real-time applications.

3.9.5 The platform shall comply with RFC 2190 for H.263

3.9.6 The platform shall comply with RFC 2429 for H.263+

3.9.7 The platform shall comply with RFC 3016 for MPEG-4

3.9.8 The platform shall comply with RFC 3984 for H.264

3.10 The streaming platform shall support on-demand audio and video transcoding down to 30kbps for video and AMR 12.2 kbps for audio.

3.11 The streaming platform shall support on-demand frame scaling facilities to match client capabilities to arbitrary frame sizes (as supported by codecs) including QVGA, CIF, QCIF and may be extendible up to VGA or higher resolutions.

3.12 The streaming platform shall support on-demand adaptation of Flash Video (FLV) file format to 3GP streaming format.

3.13 The streaming platform shall support on-demand adaptation of Flash Video (FLV) format to 3GPP format.

3.14 The streaming platform shall support on-demand adaptation of Windows Media Format files to 3GP streaming format.

- 3.15** The streaming platform shall support on-demand adaptation of Windows Media Format files to 3GPP format.
- 3.16** The streaming platform shall support on-demand adaptation of RTSP live streams to 3GPP format.
- 3.17** The streaming platform shall support transcoding from live encoder sources delivered over IP Multicast including MPEG2 Transport streams over UDP.
- 3.18** The streaming platform shall support the control of frame rate and encoding rate.

CHAPTER-4

Interconnectivity and Interoperability Requirements

4.1 Interface Support

4.2 The Video Streaming platform shall support Radius interface to the AAA system

4.3 The Streaming platform shall support interfaces to the content management system

4.4 The Streaming platform shall support HTTP/RTSP interfaces to the network side.

4.5 The Streaming platform shall support LDAP/HTTP interfaces to the Subscriber Management system

4.6 The Streaming platform shall support SNMP interfaces to the O & M systems.

4.7 The Streaming platform shall support DIAMETER / Radius interfaces for prepaid or postpaid subscribers.

4.8 The Streaming Platform shall support isolated Network Interfaces for External Components.

CHAPTER - 5

Quality Requirements

5.1 Quality Requirements:

- 5.2** The Video Streaming platform shall support detection and rectification of on air Packet Errors.
- 5.3** The Streaming platform shall support prevention of Video Corruption for better Audio Video Lip-Synch.
- 5.4** The Streaming platform shall support prevention of Video Ghosting for Live Streams using I-frame buffering.
- 5.5** The Streaming platform shall support the QoS mechanisms to ensure guaranteed service experience to end-users. Following QoS mechanisms shall be implemented:
 - 5.5.1** Initial control and limitation of presentation bandwidth based on subscription data.
 - 5.5.2** Regulation of total system bandwidth consumption, by prioritization of ongoing streaming sessions over new ones.
 - 5.5.3** Support for Differentiated Services (DiffServe) for prioritization of time critical IP traffic enabling End-To-End QoS in combination with Radio Network QoS bearers.

CHAPTER – 6

EMI/EMC Requirements

6.1 Electromagnetic Interference

The equipment shall conform to the following EMC requirements for Class A:

General Electromagnetic Compatibility (EMC) Requirements: - The equipment shall conform to the EMC requirements as per the following standards and limits indicated therein. A test certificate and test report shall be furnished from a test agency.

a) Conducted and radiated emission (*applicable to telecom equipment*):

Name of EMC Standard: "CISPR 22 {2006}-Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment".

Limits:-

- i) To comply with Class A of CISPR 22 {2006}
- ii) The values of limits shall be as per TEC Standard No. **SD/EMI-02/03 May.2006 with amendment No. 1 Dt. 01.01.2008.**

Alternatively the testing conducted against the CISPR 22 (2003) or its later editions with associated limits for Class A, as given in tables 4(a) or 4 (a1), 5(a) or 5(a1) , 6 and 7 of TEC Standard No. **SD/EMI-02/03 May.2006 with amendment No. 1 Dt. 01.01.2008,** shall also be acceptable till March 2009.

OR

Conducted and radiated emission (applicable to instruments such as power meter, frequency counters etc.):

Name of EMC Standard: "CISPR 11 {2004}- Industrial, scientific and medical (ISM) radio- frequency equipment-Electromagnetic disturbance characteristics- Limits and methods of measurement"

Limits :-

- i) To comply with the category of Group 1 of Class A of CISPR 11 {2004}
- ii) The values of limits shall be as per clause No. 8.5.2 of TEC Standard No. **SD/EMI-02/03 May.2006 with amendment No. 1 Dt. 01.01.2008.**

Alternatively the testing conducted against CISPR 11 (2003) or its later editions with limits, as given in tables 5 (a) or 5 (a1) and 7 of TEC Standard No. **SD/EMI-02/03 May.2006 with amendment No. 1 Dt. 01.01.2008** shall also be acceptable till March 2009.

b) Immunity to Electrostatic discharge:

Name of EMC Standard: IEC 61000-4-2 {2001} "Testing and measurement techniques of Electrostatic discharge immunity test".

Limits: -

- i) Contact discharge level 2 { ± 4 kV} or higher voltage;
- ii) Air discharge level 3 { ± 8 kV} or higher voltage;

c) Immunity to radiated RF:

Name of EMC Standard: IEC 61000-4-3 (2006) "Testing and measurement techniques- Radiated RF Electromagnetic Field Immunity test"

Limits:-

- i) Under Test level 2 {Test field strength of 3 V/m} for general purposes in frequency range 80 MHz to 1000 MHz and

ii) Under test level 3 (10 V/m) for protection against digital radio telephones and other RF devices in frequency ranges 800 MHz to 960 MHz and 1.4 GHz to 6.0 GHz.

Alternatively till March 2009, the testing against 6100-4-3 (2002) or its later editions with the following test limits shall also be acceptable.

Limits:-

i) Under Test level 2 {Test field strength of 3 V/m} for general purposes in frequency range 80 MHz to 1000 MHz and

ii) Under test level 3 (10 V/m) for protection against digital radio telephones in frequency ranges 800 MHz to 960 MHz and 1.4 GHz to 2.0 GHz,

d) Immunity to fast transients (burst):

Name of EMC Standard: IEC 61000- 4- 4 {2004} "Testing and measurement techniques of electrical fast transients/burst immunity test"

Limits:-

Test Level 2 i.e. a) 1 kV for AC/DC power lines; b) 0. 5 kV for signal / control / data / telecom lines;

Alternatively till March 2009 , the testing against 61000-4-4 (1995) with Amendment No. 1 (2000) & Amendment No.2 (2001), or its later editions with the test level as mentioned above in this case, shall also be acceptable.

e) Immunity to surges:

Name of EMC Standard: IEC 61000-4-5 (2005) "Testing & Measurement techniques for Surge immunity test"

Limits:-

i) For mains power input ports : (a) 1.0 kV peak open circuit voltage for line to ground coupling (b) 0.5 kV peak open circuit voltage for line to line coupling

ii) For telecom ports : (a) 0.5 kV peak open circuit voltage for line to ground (b) 0.5 KV peak open circuit voltage for line to line coupling.

Alternatively till March 2009, the testing against 61000-4-5 (2001) or its later editions with the limits as mentioned above in this case shall also be accepted.

f) Immunity to conducted disturbance induced by Radio frequency fields:

Name of EMC Standard: IEC 61000-4-6 (2004) with amendment 1 (2004) & amd. 2 (2006) "Testing & measurement techniques-Immunity to conducted disturbances induced by radio- frequency fields"

Limits:-

Under the test level 2 {3 V r.m.s.} in the frequency range 150 kHz-80 MHz for AC / DC lines and Signal /Control/telecom lines.

Alternatively till March 2009, the testing against 61000-4-6 (2001) or its later editions with the above mentioned voltage & frequency limits shall also be acceptable.

g) Immunity to voltage dips & short interruptions (applicable to only ac mains power input ports, if any):

Name of EMC Standard: IEC 61000-4-11 (2004) "Testing & measurement techniques-voltage dips, short interruptions and voltage variations immunity tests"

Limits:-

- i) a voltage dip corresponding to a reduction of the supply voltage of 30% for 500ms(i.e. 70 % supply voltage for 500 ms)
- ii) a voltage dip corresponding to a reduction of the supply voltage of 60% for 200ms; (i.e. 40% supply voltage for 200ms) and
- iii) a voltage interruption corresponding to a reduction of supply voltage of > 95% for 5s.

Class A: Class A is a category of all other equipment, which satisfies the class A limits but not the class B limits.

The test agency for EMC tests shall be an accredited agency and details of accreditation shall be submitted.

Alternatively EMC test report from a non-accredited test lab, which is audited by an accredited lab / accrediting authority for the availability of all the essential facilities (test equipment, test chamber, calibrations in order, test instructions, skilled personnel etc.), required for performing the tests according to the EMC test methods audited, may be acceptable.

However, such accredited lab / accrediting authority should take responsibility of the test results of the “non accredited lab” along with indication of period of such delegation and the submitted test report should be of such valid period of delegation. The audit report, mentioning above facts, should be provided along with EMC test report.

Note 3:- For checking compliance with the above EMC requirements, the method of measurements shall be in accordance with TEC Standard No. SD/EMI-02/03 MAY 2006 with amendment No. 1 Dt. 01.01.2008 and the references mentioned therein unless otherwise specified specifically. Alternatively, corresponding relevant Euro Norms of the above IEC/CISPR standards are also acceptable subject to the condition that frequency range and test level are met as per above mentioned sub clauses (a) to (g) and TEC Standard No. SD/EMI-02/03 MAY 2006 with amendment No. 1 Dt. 01.01.2008. The details of IEC/CISPR and their corresponding Euro Norms are as follows:

IEC/CISPR	Euro Norm
CISPR 11	EN 55011
CISPR 22	EN 55022
IEC 61000-4-2	EN 61000-4-2
IEC 61000-4-3	EN 61000-4-3
IEC 61000-4-4	EN 61000-4-4
IEC 61000-4-5	EN 61000-4-5
IEC 61000-4-6	EN 61000-4-6
IEC 61000-4-11	EN 61000-4-11

CHAPTER – 7

Safety Requirements

7.1 Safety Requirements

- (i) The operating personnel shall be protected against shock hazards as per IS 8437 (1993)- “Guide on the effects of current passing through the human body” [equivalent to IEC publication 60479-1(1984)]. The manufacturer/supplier shall submit a certificate in respect of compliance to these requirements.
- (ii) The equipment shall conform to IS 13252 (2003)- “Safety of information technology equipment including electrical business equipment” [equivalent to IEC publication 60950 {2001}] and IS 10437 {1986} “Safety requirements of radio transmitting equipments” [equivalent to IEC publication 60215]. The manufacturer/supplier shall submit a certificate in respect of compliance to these requirements.

CHAPTER – 8

Security Requirements

- 8.1** The Video Streaming Platform shall be protected with multi-level passwords.
- 8.2** The Streaming Platform passwords shall be encrypted
- 8.3** The Streaming Platform shall have different functional and administrative interfaces CLI/GUI.
- 8.4** The Streaming Platform shall support the subscriber Blacklists and White lists as an Admission Control Policy.
- 8.5** The Streaming Platform shall support masking of the Streaming URLs in each session so as not to expose it to the end subscribers.
- 8.6** The Streaming platform shall have a Login Protection Security on all the System Access Ports like SSH/SFTP.
- 8.7** The Streaming platform shall support the following security functions for management connectivity:
 - 8.7.1** HTTPS secured for Web and GUI interfaces.
 - 8.7.2** Read-Write and Read-Only account type for accessing the elements.
 - 8.7.3** Session inactivity timeout for web UI sessions.
 - 8.7.4** Enforcement of strong passwords for management accounts.
 - 8.7.5** Tracking of old passwords per account for preventing the user to enter same password twice.
- 8.8** All interfaces on the provisioning side shall be secured.
- 8.9** The Streaming platform shall provide SSH/SFTP based interfaces to remotely access the system.
- 8.10** The Streaming platform shall support the session log.

CHAPTER-9

Other Mandatory Requirements

9.1 Scripting support and tools for application creation

- 9.1.1 The Video Streaming platform shall support scripting language as SOAP,XML etc for control over media properties, defining application logic and managing content access.
- 9.1.2 The Streaming platform shall support standard extensions for scripting for supporting a wide range of functions and interfaces to external systems and databases. The interfaces to the supporting nodes could be to perform Billing, Content Management, Operation and Maintenance (O&M), as well as Subscriber Management.

9.2 Billing Support

- 9.2.1 The Streaming platform shall support CDR for maintaining call records.
- 9.2.2 The Streaming platform shall support CDR format in ASCII format or XML format.
- 9.2.3 The Streaming platform shall support capabilities to transfer the CDR to billing system using any file transfer protocols.
- 9.2.4 The Streaming platform shall support DIAMETER (as per RFC3588) for online charging.
- 9.2.5 The Streaming platform shall support different charging models including one time viewing, subscription based services and time based credit using both pre- and post paid charging.

9.3 Database Support

- 9.3.1 The Streaming platform shall support the capability to interface to multiple external database sources simultaneously, including RDBMS.
- 9.3.2 The Streaming platform database interfaces shall support easy customization for integration into various operator/customer database infrastructures.
- 9.3.3. The Streaming platform shall retrieve data streams from storage for multimedia presentations, converting these presentations into data packets that can be sent over the underlying network for delivery to the end-user.

9.4 Configuration and Management

- 9.4.1 The Streaming platform shall support web-based management interface.
- 9.4.2 The Streaming platform shall support URI (User Resource Identifier) expression matching for multiple application/protocol support.
- 9.4.3 The Streaming platform shall support for administrator and application users
- 9.4.4 The Streaming platform shall Support for hosted applications with access controls.
- 9.4.5 The Streaming platform shall customize CDR for each application.
- 9.4.6 The Streaming platform should support Reporting and Statistics capability, a Web-based application.
- 9.4.7 The Streaming platform shall extend the SNMP based alarms and events to O&M systems

- 9.5** The Streaming platform shall provide the following functionalities:
- (i) The Streaming platform shall support session management, traffic control and QoS monitoring.
 - (ii) The Streaming platform shall create charging data and provide an interface to the support nodes that perform Billing, Authentication, Authorization, Accounting (AAA), Content Management, Operation and Maintenance (O&M), as well as Subscriber Management.
- 9.6 Platform High Availability and load balancing**
- 9.6.1** The Streaming platform shall support dynamic load-balancing to load share and distribute the traffic evenly.
- 9.6.2** The Streaming platform shall support active-active configuration or active-standby configuration by deploying multiple systems
- 9.6.3** The Streaming platform shall support load-balancing using L4-L7 switches or DNS load sharing when multiple systems are deployed.
- 9.7** The Streaming platform shall support Circuit switched streaming towards the 3G mobile terminals through a gateway.
- 9.8** The Streaming platform shall in addition to live streaming, also support the video content download and progressive downloads.
- 9.9** The Streaming platform shall support the ability to generate content play lists for client sessions to allow the presentation of pre- and post- roll ads, default promotional clips and operator logos.
- 9.10** The Streaming platform shall have a caching support to cache the transcended media and to dynamically store it for subsequent requests.
- 9.11** The Streaming platform shall fetch the contents from an external storage server, if required or access from external storage using appropriate network file sharing protocols.

CHAPTER-10

Desirable Requirement

Desirable Requirement

- 10.1** The Video Streaming Platform shall support a Web Server for still images, SMIL files, and static text information as a front end for end-subscribers to browse and access streaming content stored or accessible from this solution.
- 10.2** The Streaming Platform shall support Directory Server to provide a central repository for storing and managing identity profiles, access privileges and application information, and enables access to the Subscriber and Content Information Databases.
- 10.3** The Streaming Platform shall have an Upload Server allowing content to be uploaded to the streaming system. It shall support standard SFTP functions for the upload as well as transient storage capacity for the uploaded content.
- 10.4** The Streaming Platform shall include the encoders for converting the raw content into a streaming digital content.
- 10.5** The Streaming platform real time (transcoding, transrating and trans-sizing) response time shall be within 4 seconds (excluding source access time and client buffering)

Glossary

AAC	Advanced Audio Compression
AAA	Authentication, Authorization, and Accounting
ASCII	American Standard Code for Information Interchange
BICC	Bearer Independent Call Control
CDR	Call Detail Record
CIF	Common Intermediate Format
CLI	Command Line Interface
CLIP	Calling Line Identification Presentation
CLIR	Calling Line Identification Restriction
DNS	Domain Name System
DTMF	Dual-Tone Multi Frequency
EDGE	Enhanced Data rates for GSM Evolution
FTP	File Transfer Protocol
3G	Third Generation
3 GPP	3 rd Generation Partnership Project
3gpp2	3 rd Generation Partnership Project 2
HSDPA	High – Speed Downlink Packet Access
HTTP	Hypertext Transfer Protocol
IVR	Interactive Voice Response
IP TV	Internet Protocol Television
ISUP	ISDN User Part
IMS	IP Multimedia Subsystem
ITU	International Telecommunication Union
IETF	Internet Engineering Task Force
ISDN	Integrated Services Digital Network
LAN	Local Area Network
LDAP	Lightweight Directory Access Protocol
MMS	Multimedia Messaging Service
M3UA	MTP3 User Adaptation
MTP3	Message Transfer Part Layer 3
MONA	Media Oriented Negotiation Acceleration

O&M	Operation & Maintenance
PRI	Primary Rate Interface
QCIF	Quarter CIF
QOS	Quality of Service
QVGA	Quarter Video Graphics Array
RAS	Registration Admission status
RTP	RTCP Control Protocol
RTSP	Real Time Streaming Protocol
RoSh	Restriction of Hazardous Substance Directive
SMS	Short Message Service
SDP	Service Delivery Platform
SIP	Session Initiation Protocol
SSH	Secure Shell
SNMP	Simple Network Management Protocol
UDP	User Datagram Protocol
URI	Uniform Resources Identifier
VGA	Video Graphics Array
Imax	World Interoperability for Microwave Access
WAP	Wireless Application Protocol
WAV	Windows Wave (Audio Format)
WMA	Window Media Audio
WMV	Window Media Video
WNSRP	Windowed Numbered Simple Retransmission Protocol
XML	Extensible Mark-up Language

Annexure-II

Template for submitting Comments or Feedback

[Comments on each section/sub section/table/figure etc. be stated in a fresh row. Information/comments should include reasons for comments and suggestions for modified wordings of the clause]

Name of Commentator/Organization

S. No.	Section of the Draft Standard	Clause/Para/Table/ Figure No. of draft Standard	Comments/ Suggested modified Wordings	Justification for proposed Change
1.				
2.				
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				

Note- Kindly insert more rows as necessary for each clause/table, etc.

Name:

Email:

Mobile: